



RADICI PIETRO INDUSTRIES & BRANDS S.p.A.

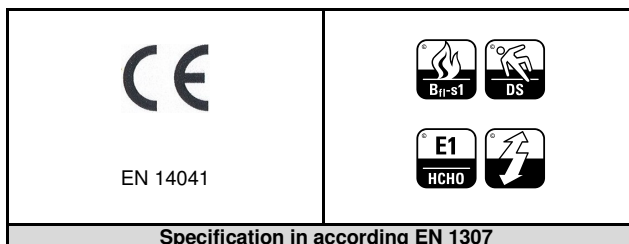

OFFICE



Specification in according EN 1307

Costruzione	Technique de fabrication	Construction	Herstellungsverfahren
Tufting riccio effetto tonale 1/10"	Tufted bouclé à effet de couleur 1/10"	Tufted loop pile tonal effect 1/10"	Getufted Schlinge mehrfarbig ungemustert 1/10"
Composizione 100% poliammide	Composition du velours 100% polyamide	Pile composition 100% polyamid	Polnutschicht 100% polyamid
Sottofondo Juta sintetica	Dossier Jute synthétique	Secondary backing Synthetic jute	Rückenausrüstung SDR Textilrucken
Punti al m² ± 90850	Touffes au m² ± 90850	Stitches per m² ± 90850	Knoten m² ± 90850
Altezza pelo ± 4.2 mm	Hauteur du velours ± 4.2 mm	Pile height ± 4.2 mm	Polhöhe ± 4.2 mm
Altezza totale ± 6.9 mm	Hauteur totale ± 6.9 mm	Total height ± 6.9 mm	Gesamtdicke ± 6.9 mm
Peso della fibra ± 700 g/m²	Poids du velours ± 700 g/m²	Yarn weight ± 700 g/m²	Polgewicht ± 700 g/m²
Peso totale ± 1950 g/m²	Poids total ± 1950 g/m²	Total weight ± 1950 g/m²	Gesamtgewicht ± 1950 g/m²
Larghezza rotolo 400 cm	Largeur du rouleau 400 cm	Roll width 400 cm	Breite 400 cm
Famiglia Tufting 3	Famiglia Tufting 3	Famiglia Tufting 3	Famiglia Tufting 3

UPEC
CSTB
U3P3E1C0
n°04/086



Colour fastness to light	≥ 5 (4 pastel shade)	Thermal resistance m² K/W	≤ 0,17
Insulation impact noise ΔLw	25 dB	Body voltage walking test kV	≤ 2
Acoustical absorption α _w	0,17		

RESISTENZA – WEARABILITY RESISTANCE - STRAPAZIERWERT				COMFORT – COMFORT CONFORT - KOMFORTWERT			
estrema	elevata	normale	sufficiente	medio	buono	alto	ottimo
extreme	high	good	normal	medium	good	very good	excellent
extrême	élevée	normale	suffisante	moyen	bon	élévé	excellent
extrem	stark	normal	gering	einfach	gut	hoch	luxuriös

Approved by Technique Management: M. Medica

Date: 12/11/2012